

# B0520W-AT THRU B0540W-AT

## SCHOTTKY BARRIER RECTIFIERS

Reverse Voltage: 20V TO 40V

Forward Current: 0.5A

### FEATURES


- ◆ Low Forward Voltage Drop
- ◆ Guard Ring Construction for Transient Protection
- ◆ High Conductance
- ◆ Also Available in Lead Free Version

### MECHANICAL DATA

- ◆ Case: SOD-123
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 16mg 0.00056oz

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

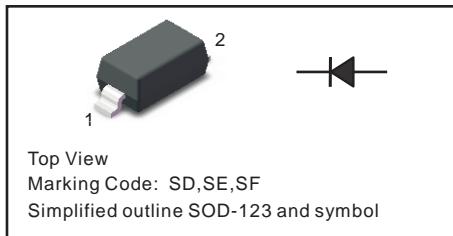

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	B0520W -AT	B0530W -AT	B0540W -AT	Units
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	20	30	40	V
RMS reverse voltage reverse voltage (DC)	V <sub>RMS</sub>	14	21	28	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	V
Maximum Average Forward Current at Ta=25°C	I <sub>o</sub>	0.5			A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	5.5			A
Maximum Instantaneous Forward Voltage	I <sub>F</sub>	0.330 0.390 —	0.375 0.430 —	0.510 0.620 —	V
Reverse current	I <sub>R</sub>	VR=10V — VR=20V — VR=30V — VR=40V	75 — 250 — 130 —	— 20 — 10 — 20	UA
Thermal Resistance, Junction to Ambient Air	R <sub>θJA</sub>	200			°C/W
Junction temperature	T <sub>j</sub>	-55 ~ +125			V
Storage temperature	T <sub>stg</sub>	-55 ~ +150			V

Dated:01/2017

Rev: 1.0

# B0520W-AT THRU B0540W-AT

## Typical Characteristics Curves

Fig.1 Forward Current Derating Curve

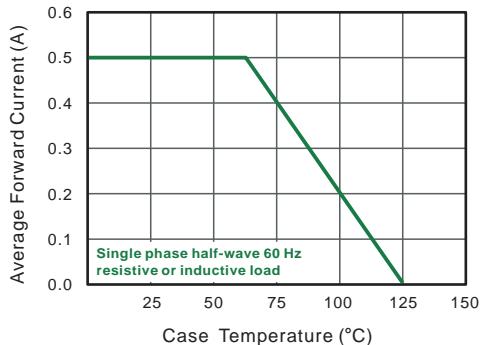


Fig.2 Typical Reverse Characteristics

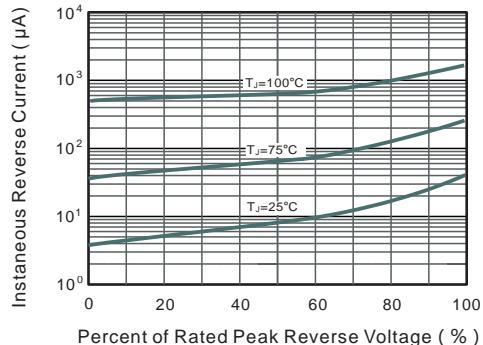


Fig.3 TYPICAL FORWARD VOLTAGE

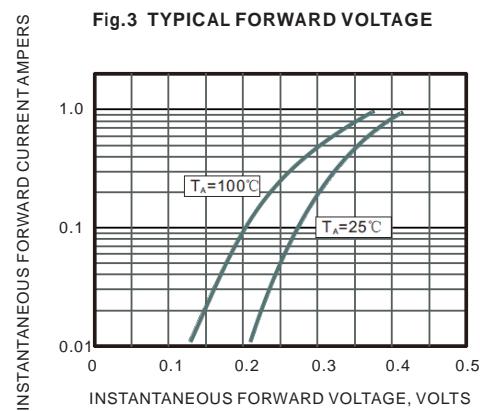


Fig.4 Typical Junction Capacitance


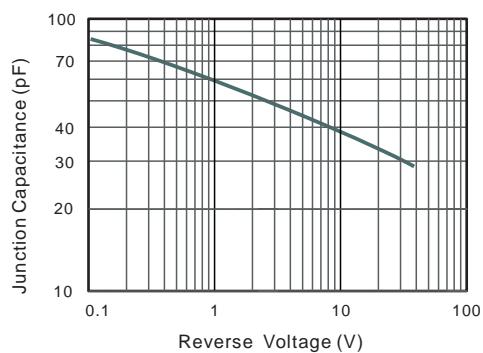



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

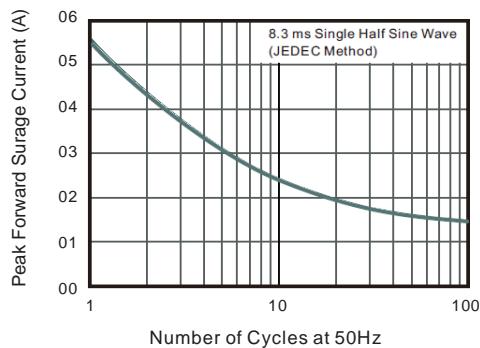


# B0520W-AT THRU B0540W-AT

## Package Outline

SOD-123

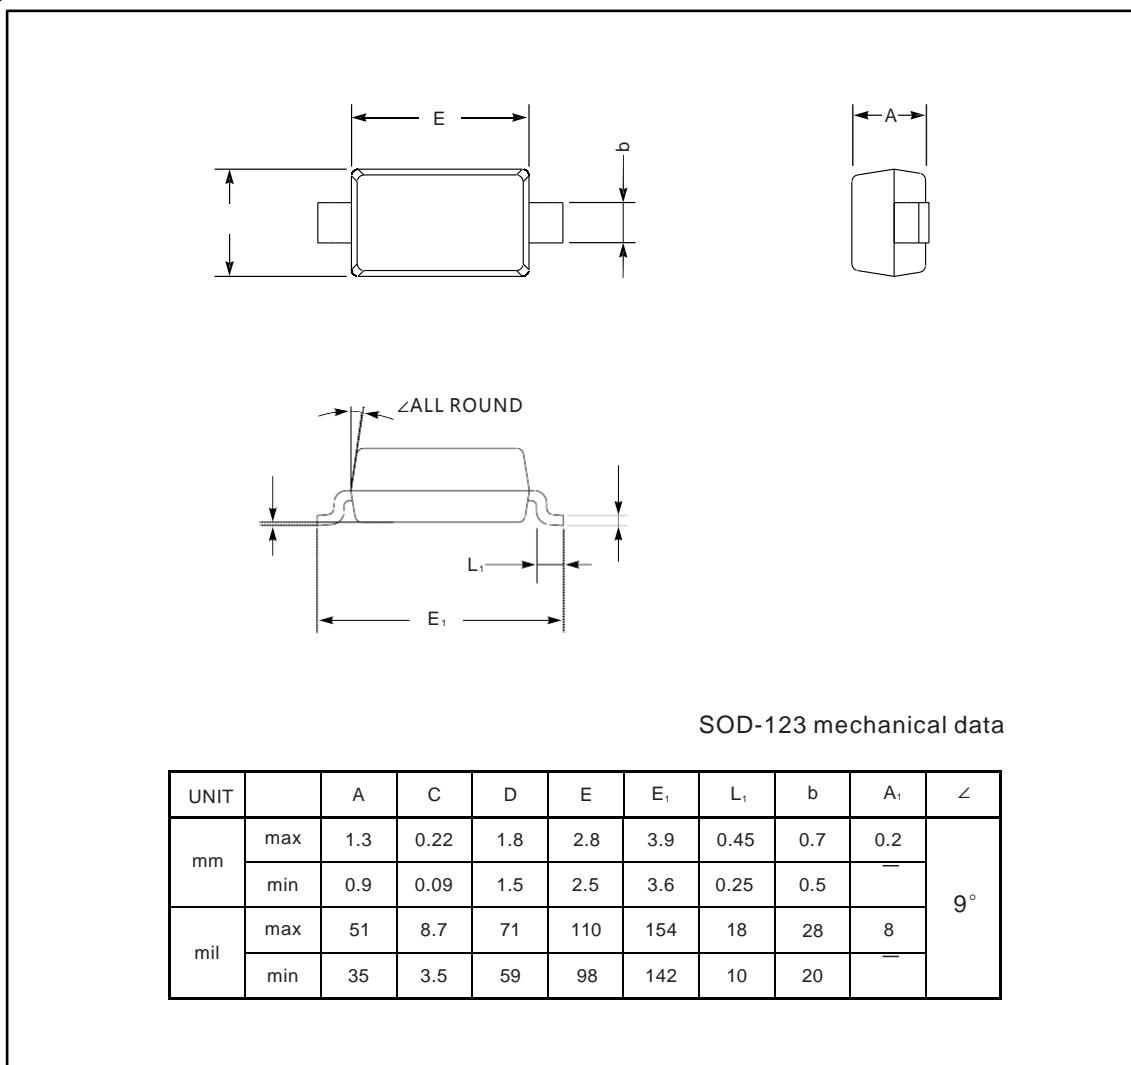

The recommended mounting pad size

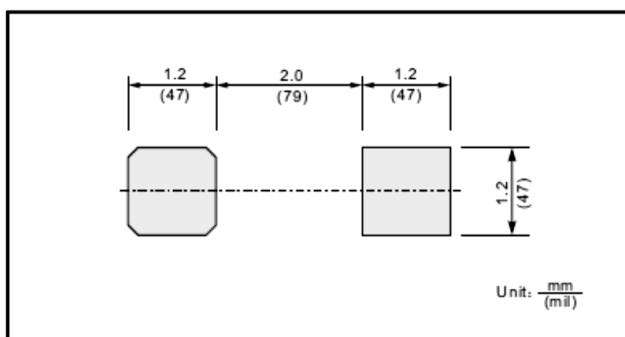

Marking

Type number	Marking code
B0520W	SD
B0530W	SE
B0540W	SF