

MB1S-05AT THRU MB10S-05AT

SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIERS

Forward Current-0.5A

Reverse Voltage-100V to 1000V

FEATURES


- ◆ Reverse Voltage: 100 to 1000 V
- ◆ Forward Current: 0.5 A
- ◆ High Surge Current Capability
- ◆ Designed for Surface Mount Application
- ◆ Glass Passivated Chip Junction

PINNING

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

MECHANICAL DATA

- ◆ Case: MBS
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Weight: 100 mg(Approx)

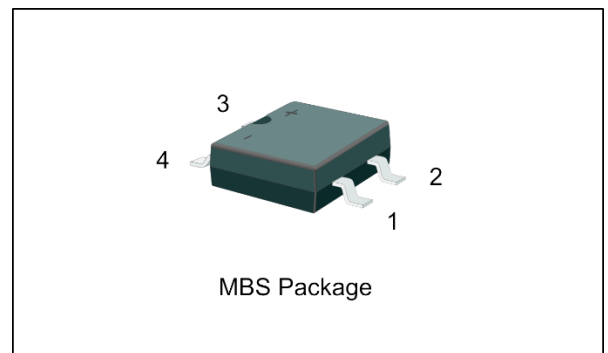

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	MB1S-05AT	MB2S-05AT	MB4S-05AT	MB6S-05AT	MB8S-05AT	MB10S-05AT	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_C=115^{\circ}C$	$I_{F(AV)}$	0.5						A
Peak Forward Surge Current (Note1)	I_{FSM}	20						A
Maximum Forward Voltage at 0.5A	V_F	1.1						V
Maximum DC Reverse Current at Rated DC Blocking Voltage at $T_A=25^{\circ}C$ at $T_A=125^{\circ}C$	I_R	5 40						μA
Typical Junction Capacitance (Note2)	C_J	11						pF
Typical Thermal Resistance (Note3)	$R_{\theta JA}$ $R_{\theta JC}$	115 35						$^{\circ}C/W$
Operating Junction Temperature Range	T_J	-55 to +150						$^{\circ}C$
Storage Temperature Range	T_{STG}	-55 to +150						$^{\circ}C$

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at 1MHz and applied reverse voltage of 4 V D.C.

3. Mounted on 4 X 1.5" X 1.5" (3.81 X 3.81 cm) copper pad areas.

Dated: 01/2016
Rev:1.0

MB1S-05AT THRU MB10S-05AT

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Average Rectified Output Current Derating Curve

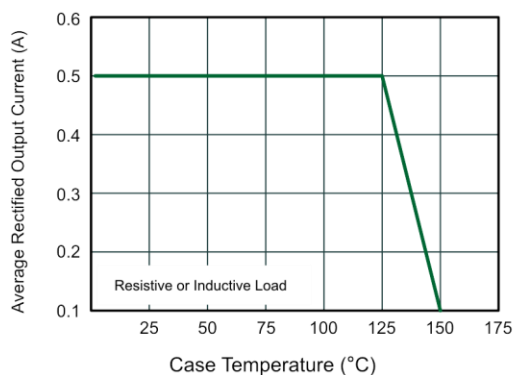


Fig.2 Typical Reverse Characteristics

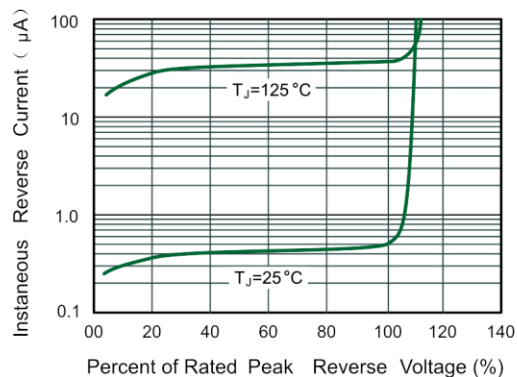


Fig.3 Typical Instantaneous Forward Characteristics

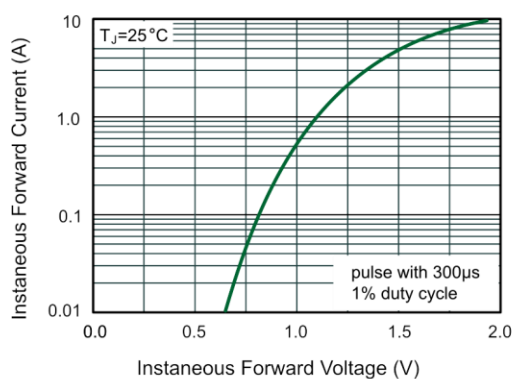


Fig.4 Typical Junction Capacitance


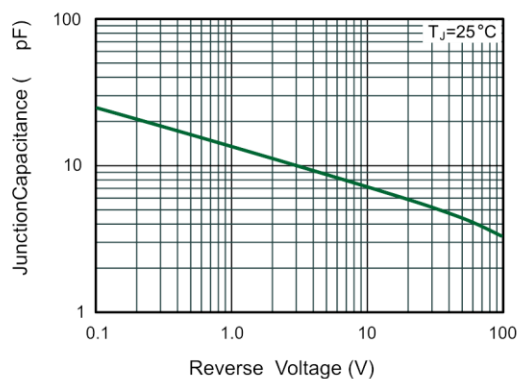



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

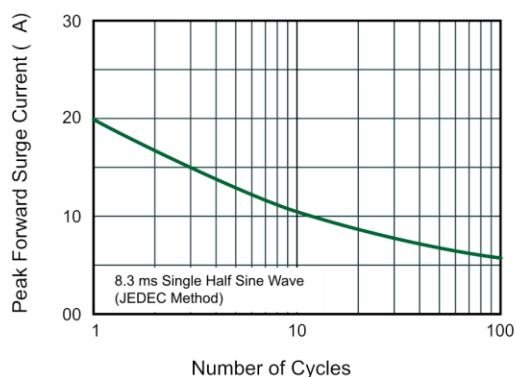

MB1S-05AT THRU MB10S-05AT

PACKAGE OUTLINE

MBS

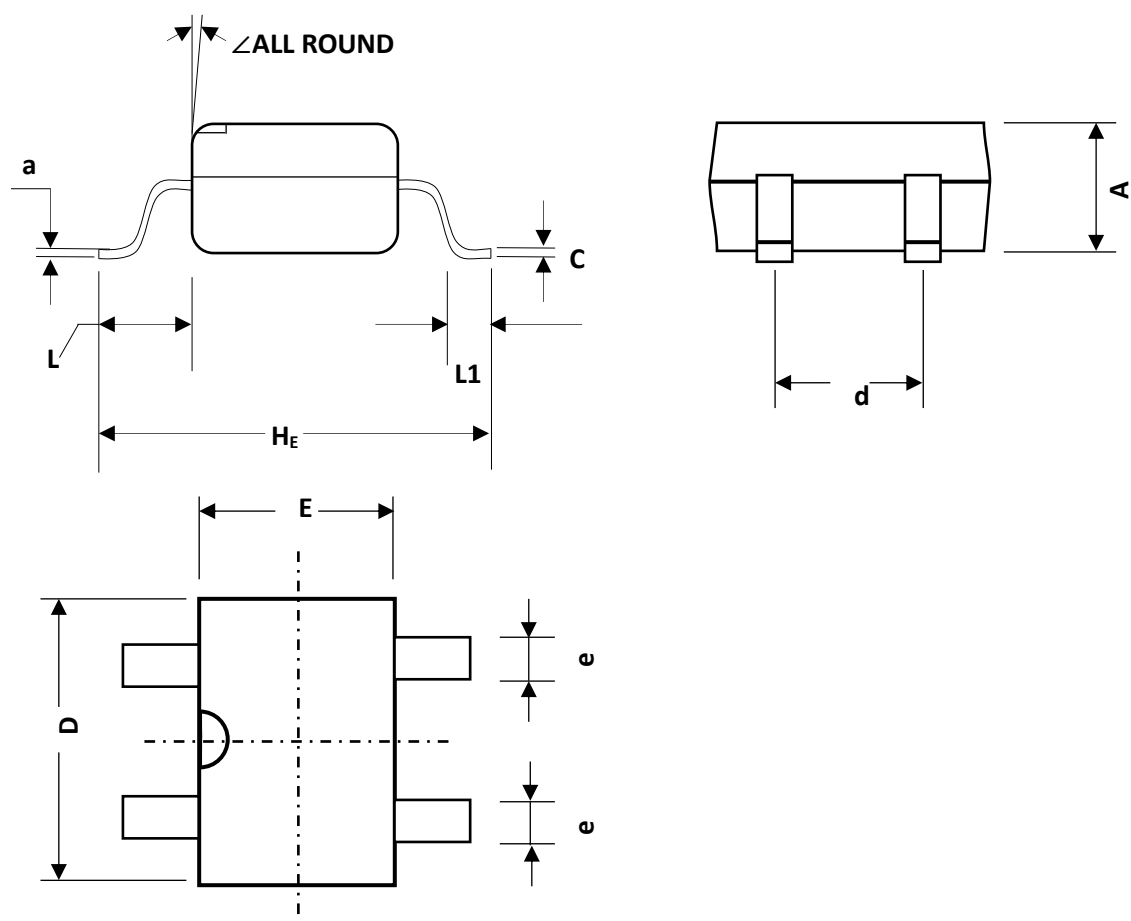

MBS mechanical data

UNIT		A	C	D	E	H _E	d	e	L	L ₁	a	∠
mm	max	2.6	0.22	5.0	4.1	7.0	2.7	0.7	1.7	1.1	0.2	7°
	min	2.2	0.15	4.5	3.6	6.4	2.3	0.5	1.3	0.5	—	
mil	max	102	8.7	197	161	276	106	28	67	43	8	
	min	94	5.9	177	142	252	91	20	51	20	—	

ORDERING INFORMATION

Device	Package	Shipping
MB1S-05AT thru MB10S-05AT	MBS	3,000/Tape & Reel (13 inches)