

S3ABF-AT thru S3MBF-AT

SURFACE MOUNT GENERAL PURPOSE SILICON RECTIFIERS

Forward Current-3.0A

Reverse Voltage-50V to 1000V

FEATURES


- ◆ For surface mount applications
- ◆ Glass passivated chip junction
- ◆ Low profile package
- ◆ Easy to pick and place
- ◆ Lead free in comply with EU RoHS2011/65/EU directives

MECHANICAL DATA

- ◆ Case: SMBF molded plastic body
- ◆ Terminals: Solderable per MIL-STD-750 , Method 2026
- ◆ Weight: Approximated 0.057 grams

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

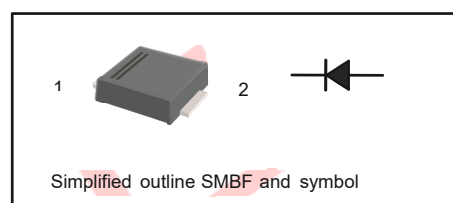

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	S3ABF-AT	S3BBF-AT	S3DBF-AT	S3GBF-AT	S3JBF-AT	S3KBF-AT	S3MBF-AT	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_C=115^{\circ}C$	$I_{F(AV)}$	3.0							A
Peak Forward Surge Current (Note1)	I_{FSM}	100							A
Maximum Forward Voltage at 3.0 A	V_F	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage at $T_A=25^{\circ}C$ $T_A=125^{\circ}C$	I_R	5 150							μA
Typical Junction Capacitance (Note2)	C_J	35							pF
Typical Thermal Resistance (Note3)	$R_{\theta JA}$ $R_{\theta JC}$	45 15							$^{\circ}C/W$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150							$^{\circ}C$

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at 1MHz and applied reverse voltage of 4V D.C.

3. P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

Dated: 07/2017
Rev:2.0

S3ABF-AT thru S3MBF-AT

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

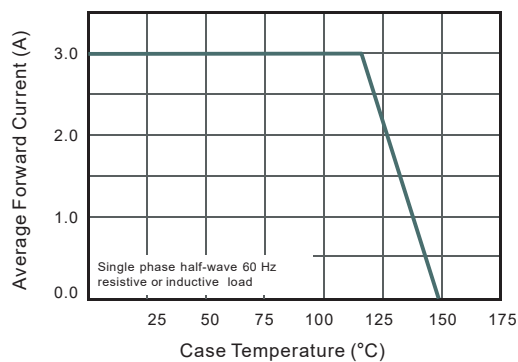


Fig.2 Typical Reverse Characteristics

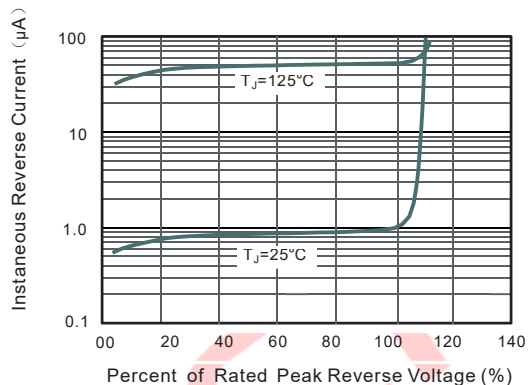


Fig.3 Typical Forward Characteristics

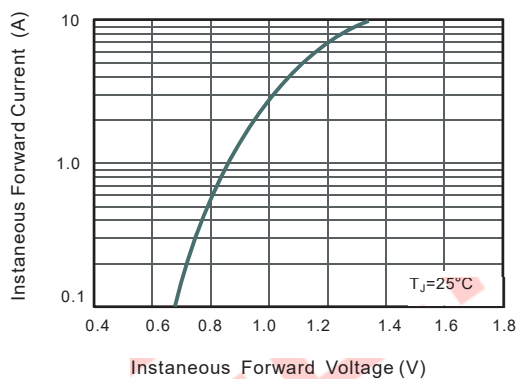


Fig.4 Typical Junction Capacitance


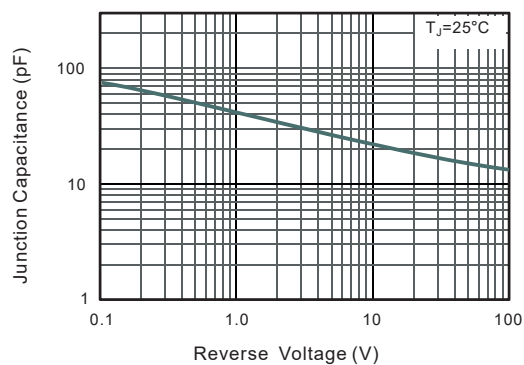



Fig.6 Maximum Non-Repetitive Peak Forward Surge Current

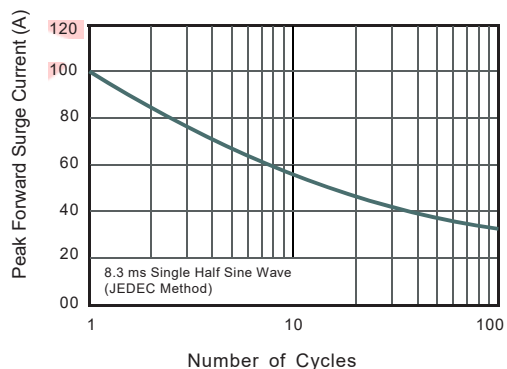

S3ABF-AT thru S3MBF-AT

PACKAGE OUTLINE

SMBF

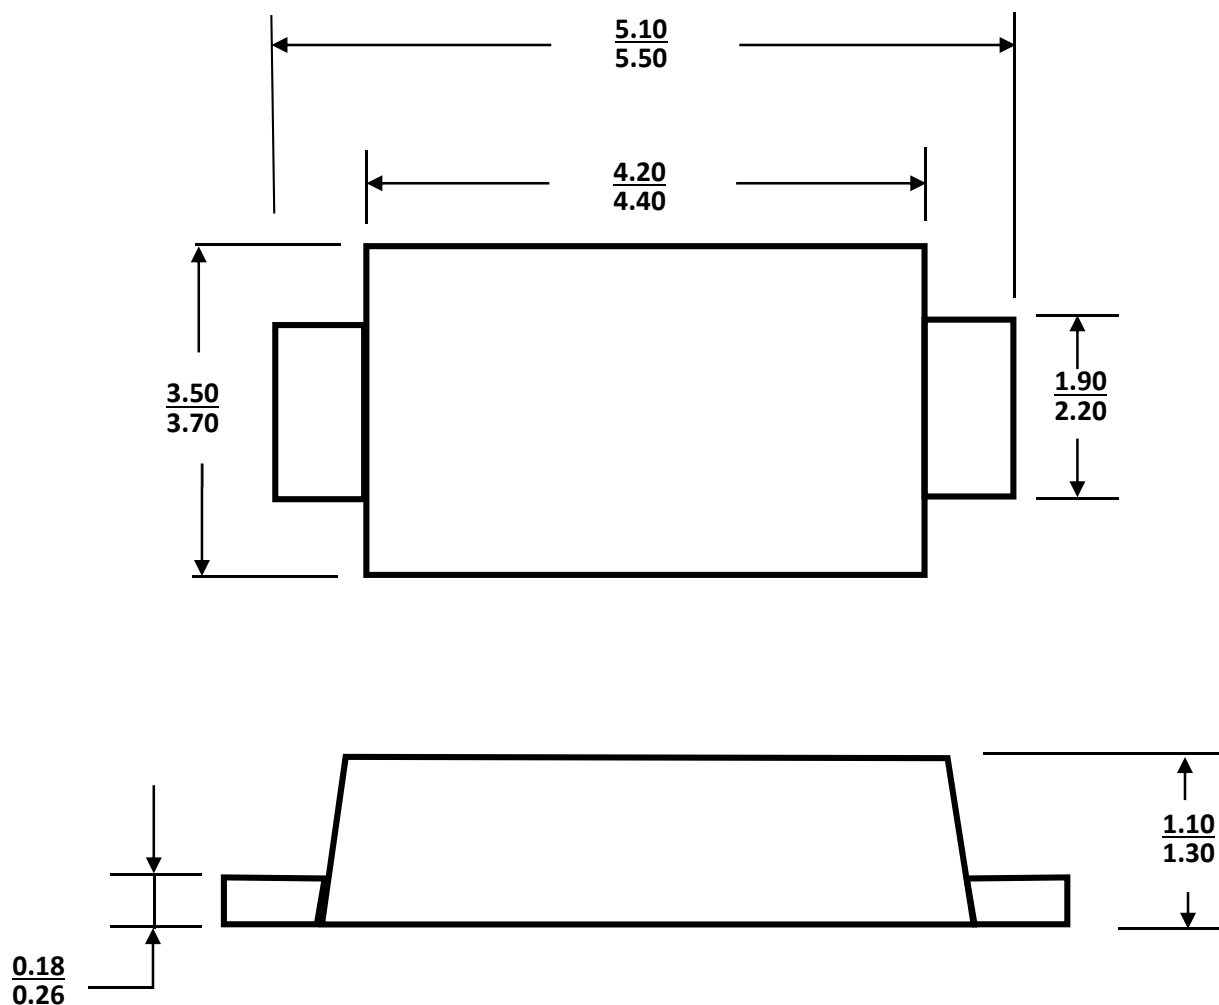

Dimensions in millimeters

ORDERING INFORMATION

Device	Package	Shipping
S3ABF-AT thru S3MBF-AT	SMBF	5,000/Tape & Reel (13 inches)

Dated: 07/2017
Rev:2.0